

# 中联重科

最大喂料尺寸:

进口尺寸:

装机功率:



**ZOOMLION**

颜色组合已取得注册商标保护

Modularized assembly technology facilitates transport and maintenance.

The max capacity of ZMI1213G mobile impactor crusher is 350t/h, and the max feeding grain size is 600mm.


The smart control systems of ZMI1213G mobile impactor crusher have the function of remote real-time diagnostics & easy process optimization.

The various options that include an additional screen module with a return conveyor, magnetic separator and air blower greatly expand the application.

The ZMI1213G mobile impactor crusher is equipped with a load-sensitive hydraulic control system, which has the advantages of low caloric value, less power loss, accurate and safe control.

The core components are provided by industry-leading manufacturers which guarantees the reliability of ZMI1213G mobile impactor crusher.

整车尺寸参数

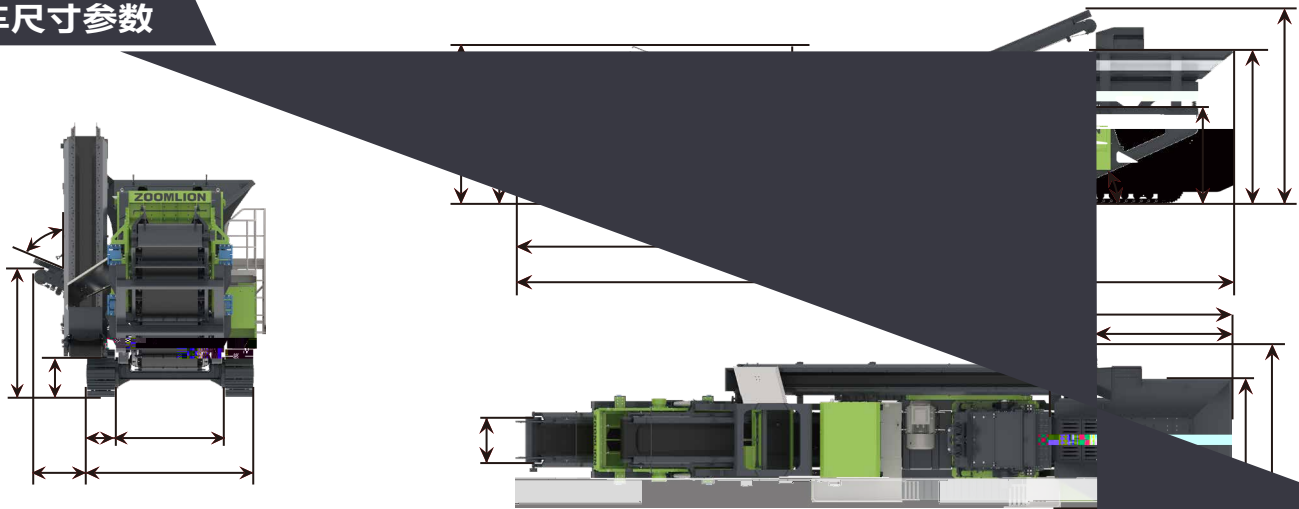

整车性能参数

主要参数 Main Parameters	单位 Unit	数
Capacity	t/h	
Inlet Size	mm	
Main Conveyor Width x Length	mm	B
Discharge Height	mm	
Crushing Device Power	kW	
Engine Power	kW	
Driving Power	kW	
Transport Size Width x Length x Height	m	1
Total Weight	t	
Power Type	\	

注：外接市电（三相电 380-450V，50Hz）或外接发电机组（与 ZMS2065G 成套）

